




FLOATING PUMP





FLOATING PUMPS

The Jamesway Floating Pump delivers big flow and pressure in a low maintenance package. Built heavy duty from top to bottom, reliability and simplicity make the Jamesway Floating Pump your best choice.

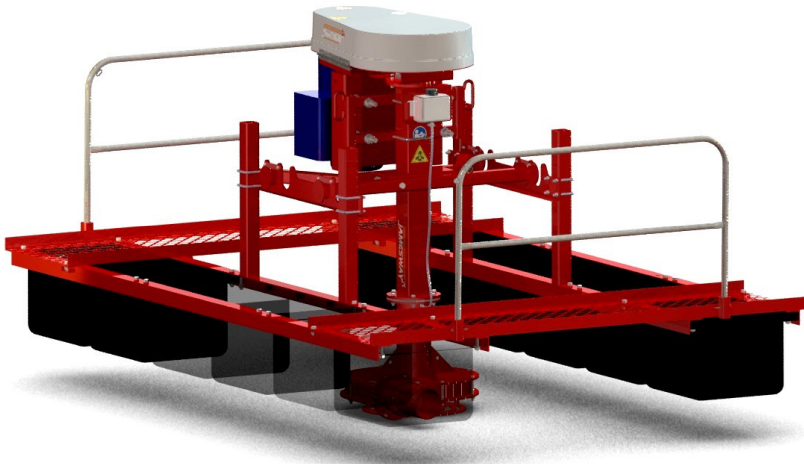

Specifications:

IMPELLER: 20" DIAMETER
MOTOR: 40 HP recommended
FLOWRATE: 2500 gpm maximum
PRESSURE: 80 ft Head Pressure (max.)



The lower bearing is never exposed to manure, resulting in long life and low maintenance.



The large inlet on the 20" diameter impeller easily ingests debris.



The lifting winch tilts the pump to make servicing quick and easy.

Visit our website for more information on these Jamesway products!

MANURE SYSTEMS:

- Alley Scrapers
- Vertical Electric Pumps
- Electric Prop Agitators
- Vertical PTO Pumps
- Piston Transfer Pumps
- Cross Gutter Systems
- Barn Cleaners

MANURE APPLICATION:

- Non-Steer Spreader Tanks
- Steerable Spreader Tanks
- Injection Systems
- Truck Mount Tankers
- Lagoon Pumps
- Prop Agitators
- Loading Pumps

FEEDING SYSTEMS:

- Silo Unloaders
- Feeders
- Conveyors
- Hammer Mills
- Power Feed Carts
- Bedding Choppers

Jamesway Farm Equipment products are designed in conformance to ASAE Standards S354.4 "Safety for Farmstead Equipment" and S318.15 "Safety for Agricultural Equipment". Some photos in this brochure have safety shields removed or open to show additional detail on equipment features. Never operate equipment without safety shields in place. Jamesway continually updates and improves products and reserves the right to make changes in the design, specifications, and to add improvements to our products, without incurring an obligation on equipment purchased.

JAMESWAY FARM EQUIPMENT, INC.
12 Route 249
St. Francois-Xavier (Quebec) JOB 2V0
Tele: (819) 845-7824
Fax: (819) 845-5153

DEALER:

JAMESWAY FARM EQUIPMENT, INC.
USA Warehouse
15383 State Hwy. 131
Tomah, WI 54660

www.JameswayFarmEq.com